




Range Line Led


RANGE LINE LED RECESSED SINGLE PIECE



Dimensions

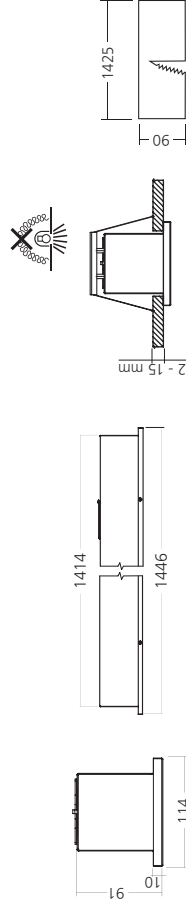

LIDC



Description

- MOUNTING** Ceiling recessed
- LIGHT SOURCE** LED
- OPTICAL SYSTEM** Opal diffuser (OPD)
- LIGHT DISTRIBUTION** Direct
- WIRING** Electronic control gear FIX / DALI (ECG / EDA)
- MATERIALS** Diffuser: opal PMMA
Holder: sheet steel
Housing: sheet steel
Housing: white (RAL 9003)
- SURFACE FINISH** 220-240 V, 50-60 Hz
- VOLTAGE** > 0,95
- POWER FACTOR** 5750 / 5900 lm
- NET LUMEN OUTPUT (Ta=25°C)** +/- 10 %
- LUMINOUS FLUX TOLERANCE** 48 W
- POWER CONSUMPTION** 120 / 123 lm/W
- SYSTEM EFFICACY**
- CORRELATED COLOUR TEMPERATURE** 3000 / 4000 K
- COLOUR RENDERING INDEX** 80 Ra
- COLOUR TOLERANCE** 3 SDCM
- EEC** A++ / A+ / A
- PROTECTION CLASS** I
- THERMAL MANAGEMENT** Passive
- SERVICE LIFETIME (Ta=25°C)** 50,000 hours / L80
- AMBIENT OPERATING TEMPERATURE** From -20 °C to +35 °C
- IP PROTECTION DEGREE** IP20, optical part IP40
- DIMENSIONS (L x W x H)** 1446 x 114 x 91 mm
- OPENING (L x W)** 1425 x 90 mm
- WEIGHT** 3,9 kg

- AREAS OF APPLICATION** ARCHITECTURE AND MEDIA
- EDUCATION
- RETAIL AND PRESENTATION

